		Supersedes Revision. 06/07/2018	
1. P	RODUCT AND COMPANY	IDENTIFICATION	
Company Name:	Goof Off Professional Strength VOC C W. M. Barr 2105 Channel Avenue Memphis, TN 38113	Compliant Phone Number: (901)775-0100	
	www.wmbarr.com		
	3E 24 Hour Emergency Contact W.M. Barr Customer Service	(800)451-8346 (800)398-3892	
Product Category:	General Purpose Adhesive Remover		
ntended Use:	Mult-Purpose Remover for tar, ink, pai	nt, adhesive, etc.	
	FG603BULK, FG612, FG653, FG654, FG655B, FG655BUL, FG657, FG683, FG690, FG750, 2410B.4, FG661, FG661CAN, FG631		
	2. HAZARDS IDENTIF		
Serious Eye Damage/Eye Irrit Carcinogenicity, Category 2 Specific Target Organ Toxicit	y (single exposure), Category 1		
GHS Signal Word:	Danger		
GHS Hazard Phrases:	Highly flammable liquid and vapor. Causes serious eye irritation. Harmful if inhaled. Suspected of causing cancer {if inhale Causes damage to organs {ears, liver, nervous system}.	ed}. , kidneys, eyes, respiratory system, central	
GHS Precautionary Phrases:	Obtain special instructions before use. Do not handle until all safety precaution Keep away from heat/sparks/open flar Keep container tightly closed. Ground/bond container and receiving of Use explosion-proof electrical/ventilati	ons have been read and understood. mes/hot surfaces No smoking. equipment.	
	Use only non-sparking tools.		
GHS Response Phrases:	Take precautionary measures against Do not breathe gas/mist/vapors/spray. Wash hands thoroughly after handling Do not eat, drink or smoke when using Use only outdoors or in a well-ventilate Wear protective gloves/protective cloth IF ON SKIN (or hair): Remove/take off with water/shower. IF INHALED: Remove victim to fresh a breathing.	e static discharge. g this product. ed area. hing/eye protection/face protection. f immediately all contaminated clothing. Rinse skin air and keep at rest in a position comfortable for ter for several minutes. Remove contact lenses, if ing.	

	IF exposed or concerned: Get medical attention/advice. Call a POISON CENTER or doctor/physician if you feel unwell. Specific treatment see label.
	If eye irritation persists, get medical advice/attention. In case of fire, use dry chemical powder to extinguish.
GHS Storage and Disposal Phrases:	Store in cool/well-ventilated place. Store locked up.
	Dispose of contents/container according to local, state and federal regulations.
OSHA Regulatory Status:	This material is classified as hazardous under OSHA regulations.
Potential Health Effects Acute and Chronic):	This product has not been tested as a whole to determine health effects. The health effects listed below are associated with the individual ingredients listed in Section 3.
	INHALATION:
	High vapor concentrations may lead to central nervous system effects (drowsiness, dizziness, nausea, headaches, headaches, cyanosis, loss of consciousness and even death). Reports have associated repeated and prolonged overexposure to solvents with neurological and other physiological damage. Intentional misuse by deliberately concentrating and inhaling solvents may be harmful or fatal.
	EYES: High vapor concentrations may cause irritation of the eyes. May cause eye burning pain, irritation, conjuctivitis, corneal vacuolation, and keratitis.
	SKIN: Prolonged or repeated contact may cause drying, cracking, or irritation.
	INGESTION: Harmful or fatal if swallowed. May cause nausea, vomiting, diarrhea and inflammation of the lungs. Irritating to the throat, mouth, and stomach. May produce central nervous system effects, which include dizziness, loss of balance and coordination, unconsciousness, coma and even death.
	This product contain methanol, which can cause metabolic acidosis, blindness, seizures, and comma.
	CHRONIC OVEREXPOSURE EFFECTS: Reports have associated repeated and prolonged overexposure to solvents with neurological and other physiological damage. Intentional misuse by deliberately concentrating and inhaling solvents may be harmful or fatal. Overexposure may cause liver and kidney injury.
	TARGET ORGANS: eyes, respiratory system, liver, kidneys, central nervous system
	PRIMARY ROUTES OF ENTRY: inhalation, ingestion, absorption

CAS # Hazardous Com 67-64-1 Acetone {2-Prop 1330-20-7 Xylene (mixed iso	ponents (Chemical Name)	RMATION ON INGREDIENTS Concentration		
67-64-1 Acetone {2-Prop 1330-20-7 Xylene (mixed iso		Concentration		
1330-20-7 Xylene (mixed iso		Concentration		
	anone}	60.0 -80.0 %		
100 41 4 Ethylbonzona (E	omers) {Benzene, dimethyl-}	7.0 -13.0 %		
100-41-4 Ethylbenzene {E	thylbenzol; Phenylethane}	1.0 -5.0 %		
67-56-1 Methanol {Methy alcohol}	/I alcohol; Carbinol; Wood	1.0 -5.0 %		
Additional Chemical	Specific percentage of con	nposition is being withheld as a trade secret.		
	4. FIRST A	ID MEASURES		
Emergency and First Aid Procedures:	, , ,	g the skin thoroughly with large amounts of water and mild noving contaminated clothing. Seek medical attention if		
	, ,	eyes with water, remove any contact lens. Continue to flush nutes, then seek immediate medical attention.		
	Inhalation: Remove to fresh air. If not breathing, give artificial respiration. If breathing is dif give oxygen. Get immediate medical attention.			
	Ingestion: If swallowed, do NOT induce vomiting. Seek immediate medical attention. Call a physician, hospital emergency room, or poison control center immediately. Never give anything by mouth to an unconscious person. If vomiting occurs, keep head lower than hips to prevent aspiration.			
Signs and Symptoms Of Exposure:	See Potential Health Effec	ts.		
Note to Physician:	Treatment of overexposure condition of the patient.	e should be directed at the control of symptoms and the clinica		
	5. FIRE FIGH	TING MEASURES		
	NFPA Class IB			
Flash Pt:	1.00 F Method Used: S	Setaflash Closed Cup (Rapid Setaflash)		
Explosive Limits:	LEL: No data.	UEL: No data.		
Autoignition Pt:	NE			
Suitable Extinguishing Medi	i a: Carbon dioxide, dry chemi	cal, foam and/or water fog.		
Unsuitable Extinguishing Media:	None known.			
Fire Fighting Instructions:	buildings or confined area water spray to prevent pre been exposed to intense h			
Flammable Properties and Hazards:	•	ir and may travel along the ground or be moved by ventilation s, flame, and other ignition sources distant from material		
Licensed to W.M. Barr and Company		GHS forma		

Revision: 03/26/2019 Supersedes Revision: 06/07/2018

Flammability Classification:

	6. ACCIDENTA	L RELEASE ME	ASURES	
Steps To Be Taken In Case	Vapors may cause fla	sh fire or ignite explosiv	vely.	
Material Is Released Or				_
Spilled:		• • • •	solate hazard area and de	
	•		d spaces before entering. of hazard area. Use non-s	-
		•	for all equipment and prod	
			us of vapors collecting in	-
		ying areas, confined sp		
	Small spills: Take up	with sand, earth or othe	er noncombustible absorb	ent material and
		ainer where applicable.		
	Large spills: Dike far	ahead of spill for later o	lisposal.	
		oose in accordance with	applicable local, state an	d federal
	regulations.			
	7 HANDI		AGE	
Descentions To Do Tol on in				Cinco emoto
Precautions To Be Taken in Handling:	-	-	broduct label before use. ings even after container	
nanunig.			egulations. Do not reuse t	
	Do not use this produc lights, stoves, etc.	ct near any source of he	eat or open flame, furnace	areas, pilot
		•	basements and bathroor	ns. Vapors can
	accumulate and explo	de if ignited.		
	Do not spread this pro will increase dramatics	U	areas because fire and h	ealth safety risks
Precautions To Be Taken in	Keep container tightly	closed when not in use	. Store in a cool, dry plac	e. Do not store
Storing:	near flames or at eleva	ated temperatures.		
Other Precautions:	Keep away from heat,	sparks and open flame	. No smoking.	
8. EXP	POSURE CONTR	OLS/PERSONA	L PROTECTIO <u>N</u>	
CAS # Partial Chemical	l Name C	SHA TWA	ACGIH TWA	Other Limits

Licensed to W.M	. Barr and Company			GHS format
67-56-1	Methanol {Methyl alcohol; Carbinol; Wood alcohol}	PEL: 200 ppm	TLV: 200 ppm STEL: 250 ppm	No data.
100-41-4	Ethylbenzene {Ethylbenzol; Phenylethane}	PEL: 100 ppm	TLV: 100 ppm STEL: 125 ppm	No data.
1330-20-7	Xylene (mixed isomers) {Benzene, dimethyl-}	PEL: 100 ppm	TLV: 100 ppm STEL: 150 ppm	No data.
67-64-1	Acetone {2-Propanone}	PEL: 1000 ppm	TLV: 500 ppm STEL: 750 ppm	No data.


	Supersedes Revision: 06/07/2018
Respiratory Equipment	If exposure cannot be controlled below applicable limits, use the appropriate NIOSH
(Specify Type):	approved respirator such as an air
	purifying respirator with organic vapor cartridge. Consult the respirator manufacturer's
	literature to ensure that the respirator will provide adequate protection. Read and follow
	all respirator manufacturer's instructions.
Eye Protection:	Chemical goggles, also wear a face shield if a splashing hazard exists.
Protective Gloves:	Appropriate chemical resistant gloves should be worn, such as nitrile rubber. Wear gloves with as much resistance to the chemical ingredients as possible. Other glove materials may provide protection. Glove selection should be based on chemicals being used and conditions of use. Consult your glove supplier for additional information. Gloves contaminated with product should be discarded and not reused.
Other Protective Clothing:	To prevent skin contact wear protective clothing covering all exposed areas.
	Various application methods can dictate the use of additional protective safety equipment, such as impermeable aprons to minimize exposure.
Engineering Controls	Use only in well-ventilated areas. Ensure adequate ventilation, especially in confined
(Ventilation etc.):	areas. Where the product is used in a hazardous classified area, use explosion-proof electrical/ventilating/lighting/equipment.
Work/Hygienic/Maintenance	Wash hands thoroughly after use and before eating, drinking, smoking, or using the
Practices:	restroom.
	Do not eat, drink, or smoke in the work area.
	Discard any clothing or other protective equipment that cannot be decontaminated.
	Facilities storing or handling this material should be equipped with an emergency eyewash and safety shower.
9.	PHYSICAL AND CHEMICAL PROPERTIES
Physical States:	[]Gas [X]Liquid []Solid
Appearance and Odor:	Water white, free and clear.
	Odor threshold not determined.
Melting Point:	NE
Boiling Point:	150.00 F
Decomposition Temperature	: NE
Autoignition Pt:	NE
Flash Pt:	1.00 F Method Used: Setaflash Closed Cup (Rapid Setaflash)
Explosive Limits:	LEL: No data. UEL: No data.
Specific Gravity (Water = 1):	0.797 - 0.8021
Density:	6.65 LB/GL
Vapor Pressure (vs. Air or mm Hg):	N.D.
Vapor Density (vs. Air = 1):	>1
Evaporation Rate:	>1
Solubility in Water:	Partial

	Supersedes Revision: 06/07/2018
Saturated Vapor	N.D.
Concentration:	
Viscosity:	< 5 cps
Octanol/Water Partition Coefficient:	N.D.
pH:	N.D.
Percent Volatile:	100.0 % by weight.
VOC / Volume:	20.0000 % WT
Additional Physical Information	VOC (g/L): 161 g/L max
	N.D. = Not Determined. NE = Not Established.
	10. STABILITY AND REACTIVITY
Stability:	Unstable [] Stable [X]
Conditions To Avoid - Instability:	No data available.
Incompatibility - Materials To Avoid:	Strong oxidizing agents.
Hazardous Decomposition or Byproducts:	Carbon monoxide, carbon dioxide.
Possibility of Hazardous Reactions:	Will occur [] Will not occur [X]
Conditions To Avoid - Hazardous Reactions:	None known
	11. TOXICOLOGICAL INFORMATION
Touis de visel lufermetien.	
Toxicological Information:	This product has not been tested as a whole. Refer to section 2 for acute and chronic effects.
	CAS# 67-64-1:
	Standard Draize Test, Eyes, Species: Rabbit, 20.00 MG, Severe.
	Result: Behavioral: Change in motor activity (specific assay).
	Behavioral: Alteration of classical conditioning.
	- American Journal of Ophthalmology., Ophthalmic Pub. Co., 435 N. Michigan Ave.,
	Suite 1415, Chicago, IL 60611, Vol/p/yr: 29,1363, 1946
	CAS# 1330-20-7:
	Acute toxicity, LC50, Inhalation, Rat, 5000. PPM, 4 H.
	Result: Behavioral: Muscle contraction or spasticity.
	Lungs, Thorax, or Respiration:Other changes.
	- Raw Material Data Handbook, Vol.1: Organic Solvents, 1974., National Assoc. of
	Printing Ink Research Institute, Francis McDonald Sinclair Memorial Labor, Lehigh Univ. Bethlehem, PA 18015, Vol/p/yr: 1,123, 1974
	Standard Draize Test, Eyes, Species: Rabbit, 5.000 MG, 24 H, Severe. Result:
Licensed to W.M. Barr and Company	GHS forma

				0		sion: 06/07/2018	
		Behavioral: General anesthetic.	doprossed or	stivity)			
Chronic Tox Effects:	icological	Behavioral: Somnolence (general of Behavioral: Irritability.	Jepresseu ac	uvity).			
Ellecis.		- "Sbornik Vysledku Toxixologickeł	no Vysetreni	Latek A Pripr	·avku,", Instit	ut Pro Vychov	
		Vedoucicn P, Marhold, J.V., Institu	t Pro Vychov	u Vedoucicn	, Pracovniku (Chemickeho,	
		Prumyclu Praha Czechoslovakia, \	/ol/p/yr: -,24,	1972			
		CAS# 100-41-4:					
		Tumorigenic Effects:, TCLo, Inhala	ition, Rat, 75	0.0 ppm.			
		Result:					
		Tumorigenic: Carcinogenic by RTE	CS criteria.				
		Kidney, Ureter, Bladder: Tumors.					
			Standard Draize Test, Eyes, Species: Rabbit, 500.0 MG, Severe. Result: Effects on Fertility: Post-implantation mortality (e.g., dead and/or resorbed implants per				
		Effects on Fertility: Litter size (e.g.;	# fetuses pe	er litter; meas	ured before b	virth).	
		Effects on Embryo or Fetus: Fetoto	•			,	
		- American Journal of Ophthalmolo	•••••		, 435 N. Mich	igan Ave.,	
		Suite 1415, Chicago, IL 60611, Vo	l/p/yr: 29,136	3, 1946			
Carcinogenie	•	ACGIH A3 - Confirmed Animal Car ACGIH A4 - Not Classifiable as a H IARC 2B - Possibly Carcinogenic to	luman Carcir		elevance to H	umans	
		IARC 3: Not Classifiable as to Car	cinogenicity i	in Humans.			
CAS #	Hazardous C	Components (Chemical Name)	NTP	IARC	ACGIH	OSHA	
67-64-1	Acetone {2-F	Propanone}	n.a.	n.a.	A4	n.a.	
1330-20-7	Xylene (mixe	d isomers) {Benzene, dimethyl-}	n.a.	3	A4	n.a.	
100-41-4	Ethylbenzene	e {Ethylbenzol; Phenylethane}	n.a.	2B	A3	n.a.	
67-56-1	Methanol {M	ethyl alcohol; Carbinol; Wood alcohol}	n.a.	n.a.	n.a.	n.a.	
		12. ECOLOGICAL IN	FORMAT	ION			
General Eco	logical	This product has not been tested a	s a whole. Ir	nformation be	low will be fo	r individual	
Information:		ingredients.					
		13. DISPOSAL CONS	IDERATI	ONS			
Waste Dispo	sal Method:	Dispose of waste at an approved h accordance with applicable local, p			-	ility in	
		Do not place material in general tra	ish.				
		Do not allow material to enter bodi	es of water o	r sewers.			

Revision: 03/26/2019 Supersedes Revision: 06/07/2018

14. TRANSPORT INFORMATION

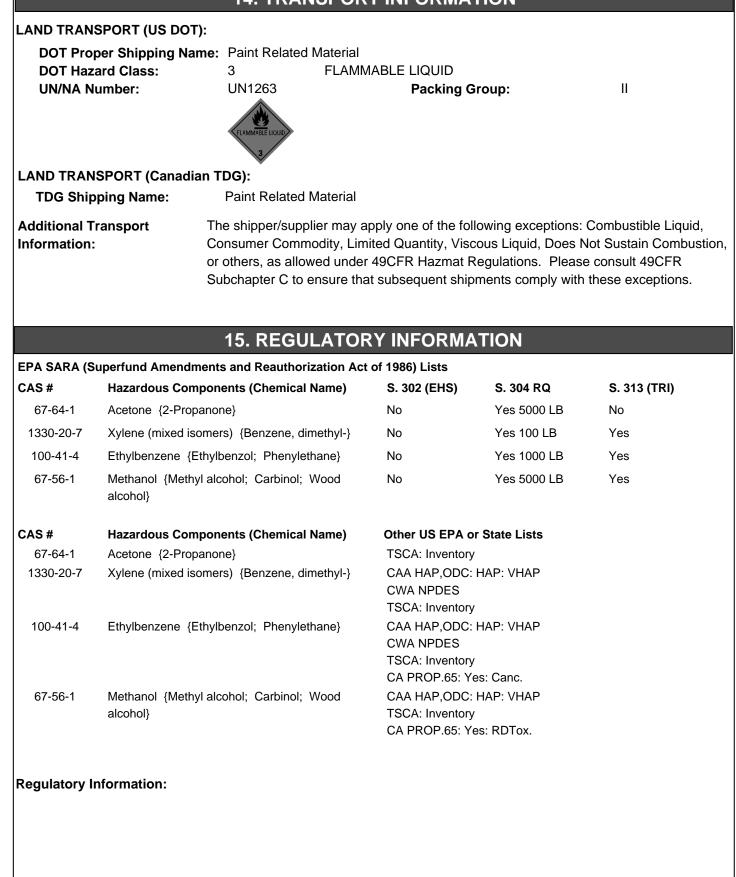

Additional Regulatory Information	This product is regulated by the United States Consumer Product Safety Commission and is subject to certain labeling requirements under the Federal Hazardous Substances Act. These requirements differ from the classification criteria and hazard information required for safety data sheets (SDS). The product label also includes other important information, including directions for use, and should always be read in its entirety prior to using the product.		
	16. OTHER INFORMATION		
Revision Date: Preparer Name: Additional Information Abo This Product:	03/26/2019 W.M. Barr EHS Dept (901)775-0100 ut No data available.		
Company Policy or Disclaimer:	The information contained herein is presented in good faith and believed to be accurate as of the effective date shown above. This information is furnished without warranty of any kind. Employers should use this information only as a supplement to other information gathered by them and must make independent determination of suitability and completeness of information from all sources to assure proper use of these materials and the safety and health of employees. Any use of this data and information must be determined by the user to be in accordance with applicable federal, state and local laws and regulations.		